



# LM321X

## Single Rail-to-Rail Output Operational Amplifier

### GENERAL DESCRIPTION

The LM321X is an independent, high-gain frequency-compensated operational amplifier, which is designed to operate from a single supply or dual supplies over a wide range of voltages.

The LM321X is available in a Green SOT-23-5 package. It is specified over the  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  temperature range.

### APPLICATIONS

Blu-ray Players and Home Theaters  
Chemical and Gas Sensors  
DVD Recorders and Players  
Digital Multimeter: Benches and Systems  
Digital Multimeter: Handhelds  
Field Transmitter: Temperature Sensors  
Motor Control: AC Induction, Brushed DC, Brushless DC, High-Voltage, Low-Voltage, Permanent Magnet, and Stepper Motors  
Oscilloscopes  
TV: LCDs and Digital  
Temperature Sensors or Controllers Using Modbus  
Weigh Scales

### FEATURES

- **Wide Supply Ranges:**
  - **Single Supply: 3V to 32V**
  - **Dual Supplies:  $\pm 1.5\text{V}$  to  $\pm 16\text{V}$**
- **Low Quiescent Current: 240 $\mu\text{A}$  (TYP)**
- **Gain-Bandwidth Product: 1.1MHz**
- **Input Common Mode Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Low Input Offset Voltage: 5.8mV (MAX)**
- **Low Input Offset Current: 20pA (TYP)**
- **Low Input Bias Current: 10pA (TYP)**
- **Open-Loop Differential Voltage Gain: 111dB (TYP)**
- **Internal Frequency Compensation**
- **$-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range**
- **Available in a Green SOT-23-5 Package**









**ELECTRICAL CHARACTERISTICS**

( $V_S = 3V$  to  $32V$ ,  $R_L = 10k\Omega$  connected to  $V_S/2$ ,  $-0.1V < V_{CM} < (+V_S) - 1.5V$ , Full =  $-40^\circ C$  to  $+125^\circ C$ , typical values are at  $T_A = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
<b>Input Characteristics</b>							
Input Offset Voltage	$V_{OS}$		+25°C		1.2	5.8	mV
			Full			6.8	
Input Bias Current	$I_B$	$V_{CM} = V_S/2$	+25°C		10		pA
Input Offset Current	$I_{OS}$	$V_{CM} = V_S/2$	+25°C		20		pA
Input Common Mode Voltage Range	$V_{CM}$		Full	-0.1		$(+V_S) - 1.5$	V
Common Mode Rejection Ratio	CMRR	$-0.1V < V_{CM} < (+V_S) - 1.5V$	+25°C	82	118		dB
			Full	72			
Open-Loop Voltage Gain	$A_{OL}$	$R_L = 10k\Omega$ to $V_S/2$	+25°C	92	111		dB
			Full	83			
<b>Output Characteristics</b>							
Output Voltage Swing from Rail	$V_{OH}$	$R_L = 10k\Omega$	+25°C		42	60	mV
			Full			80	
	$V_{OL}$	$R_L = 10k\Omega$	+25°C		110	190	mV
			Full			240	
Output Short-Circuit Current	$I_{SC}$		+25°C	12	18		mA
<b>Power Supply</b>							
Operating Voltage Range	$V_S$		Full	3		32	V
Quiescent Current	$I_Q$	$I_{OUT} = 0A$	+25°C		240	350	$\mu A$
			Full			490	
Power Supply Rejection Ratio	PSRR		+25°C	102	122		dB
			Full	98			
Turn-On Time		$G = +1$	+25°C		42		$\mu s$
<b>Dynamic Performance (<math>C_L = 100pF</math>)</b>							
Gain-Bandwidth Product	GBP		+25°C		1.1		MHz
Slew Rate	SR	$G = +1$	+25°C		0.35		$V/\mu s$
Overload Recovery Time	ORT	$V_{IN} \times G > V_S$	+25°C		2.3		$\mu s$
Phase Margin			+25°C		60		°
<b>Noise</b>							
Input Voltage Noise		$f = 0.1Hz$ to $10Hz$	+25°C		8.7		$\mu V_{P-P}$
Input Voltage Noise Density	$e_n$	$f = 1kHz$	+25°C		36		$nV/\sqrt{Hz}$







TYPICAL PERFORMANCE CHARACTERISTICS

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

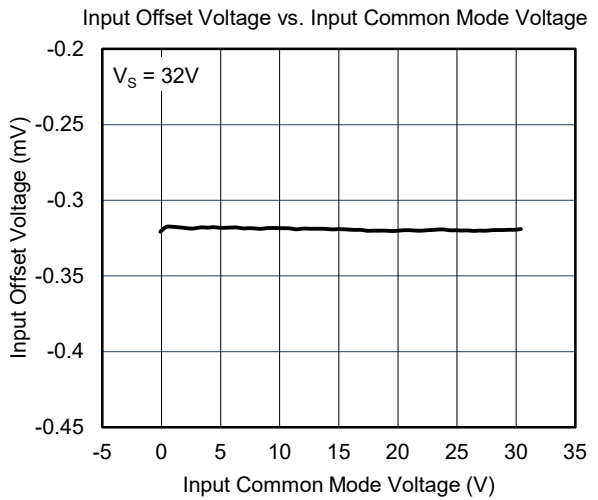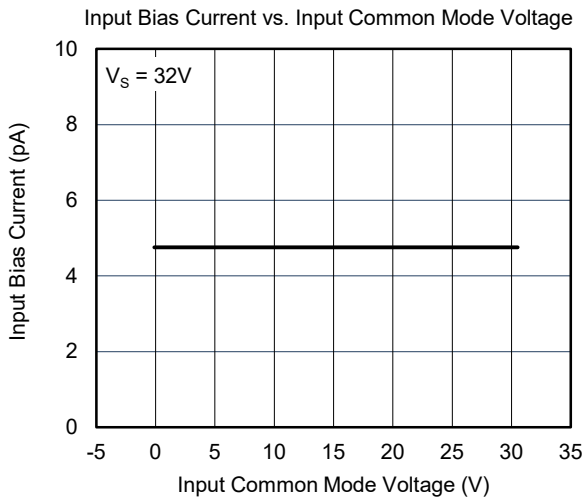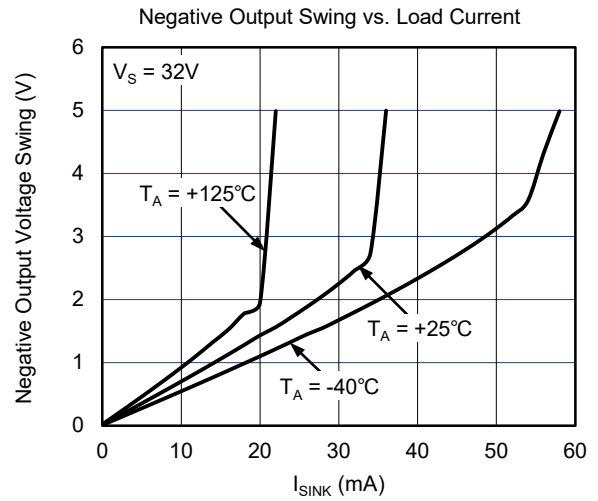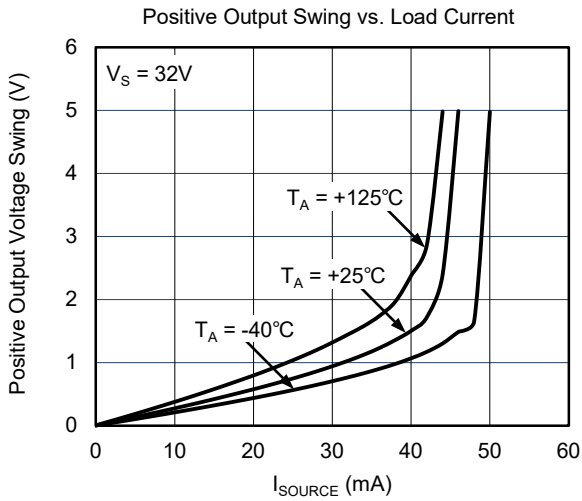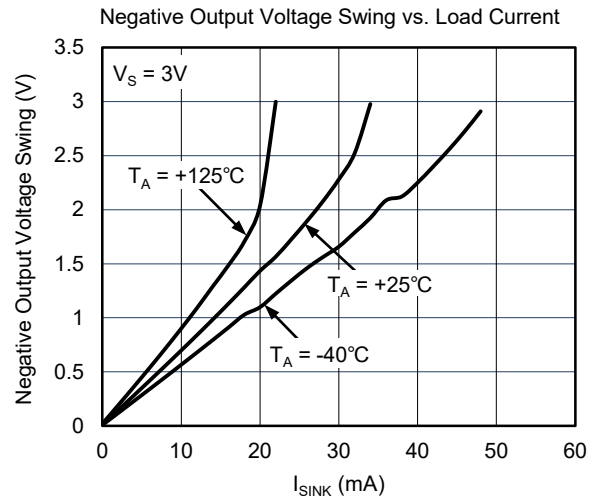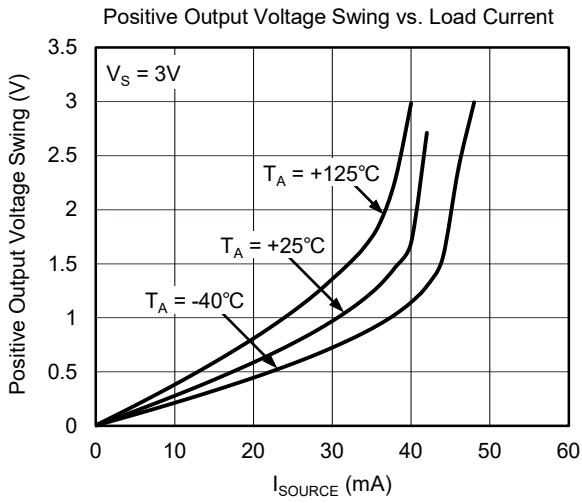







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

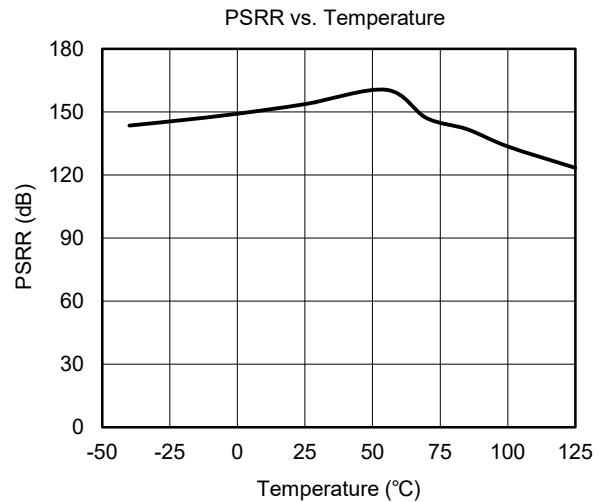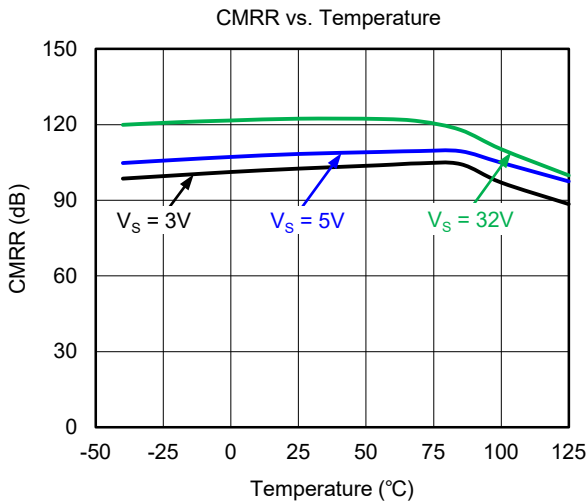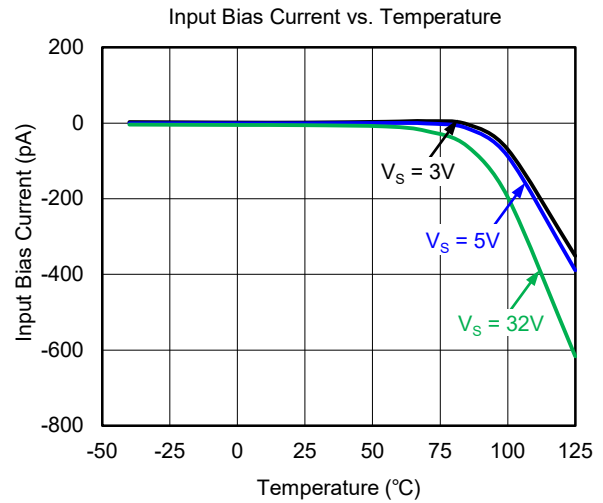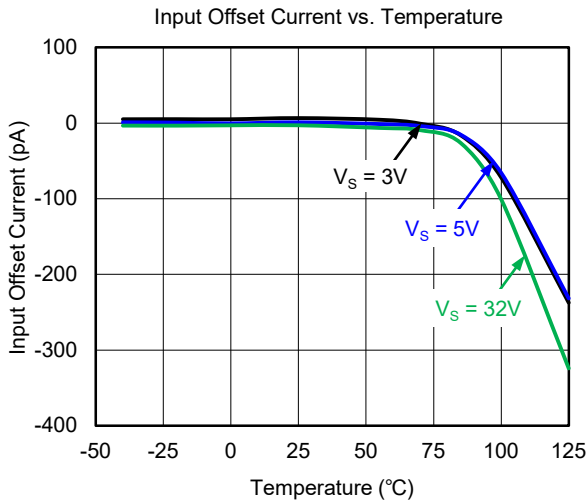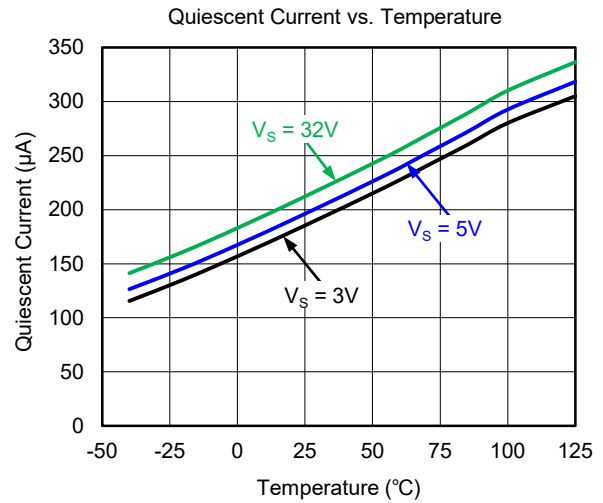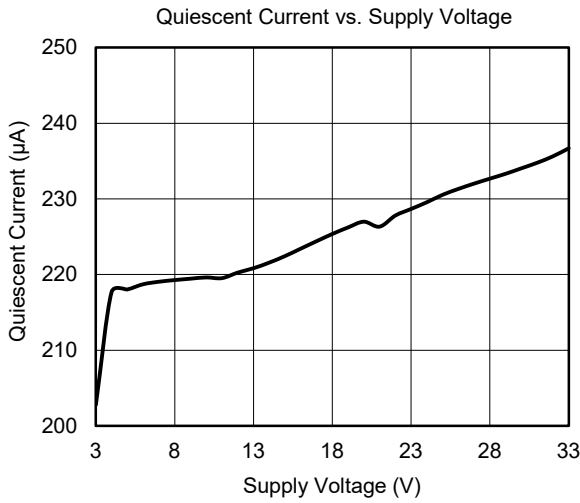







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

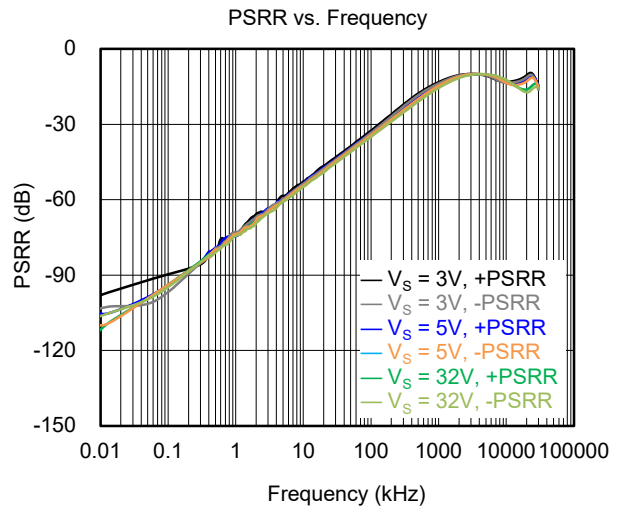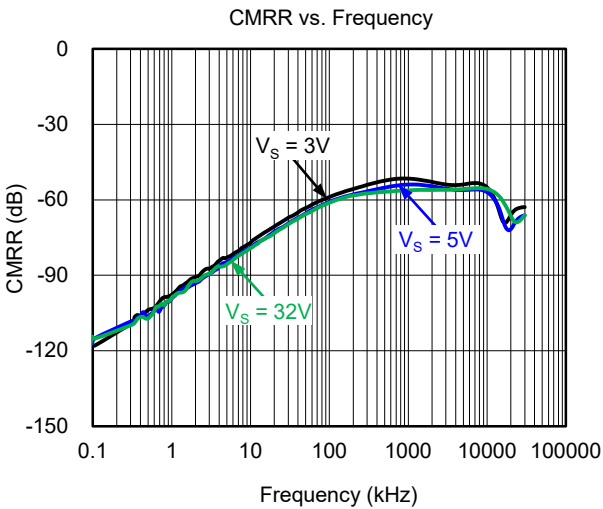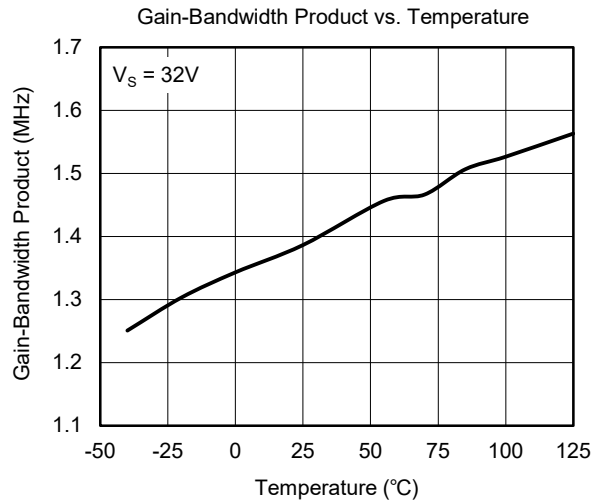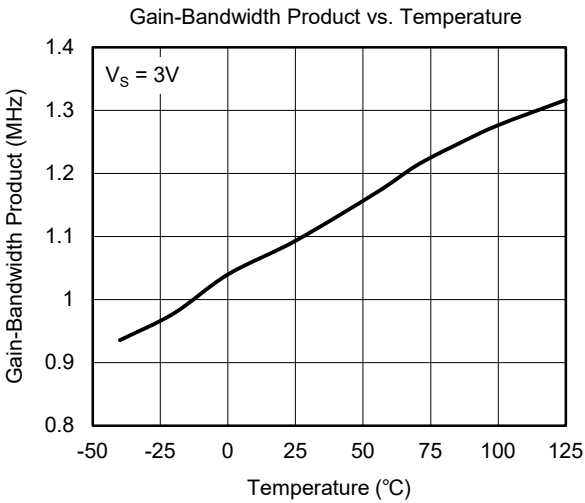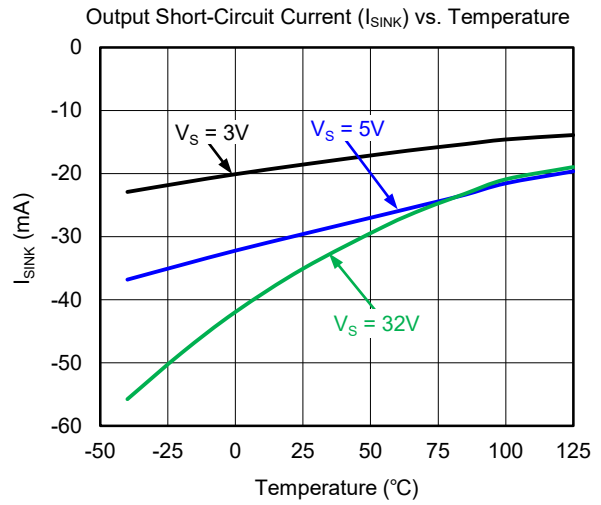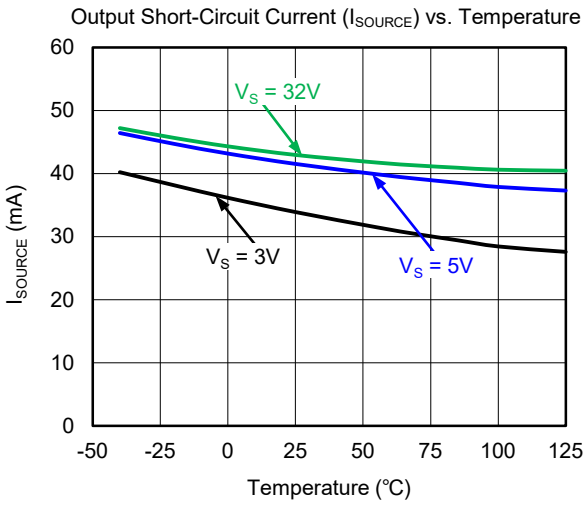







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

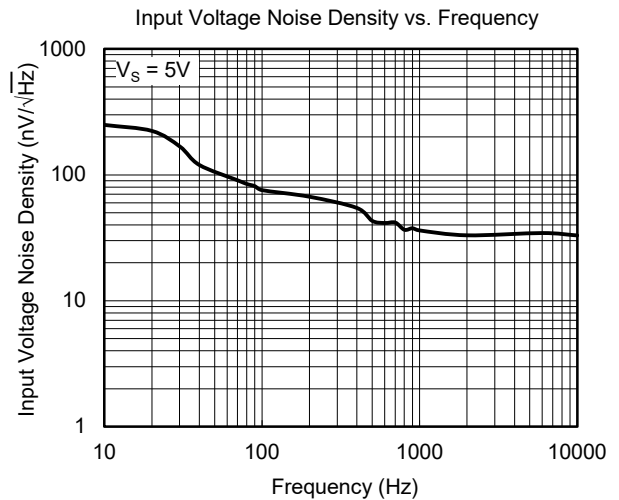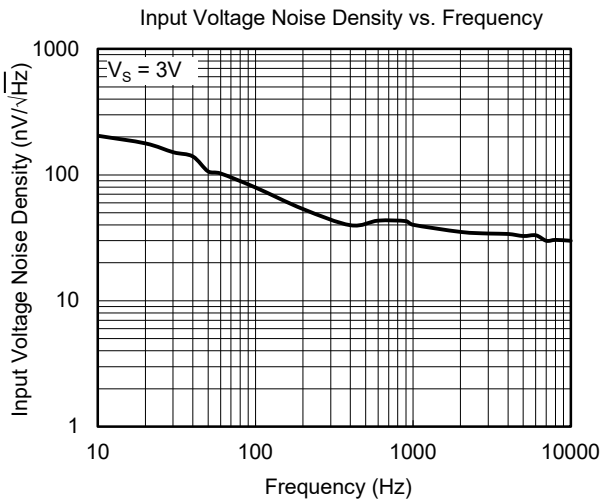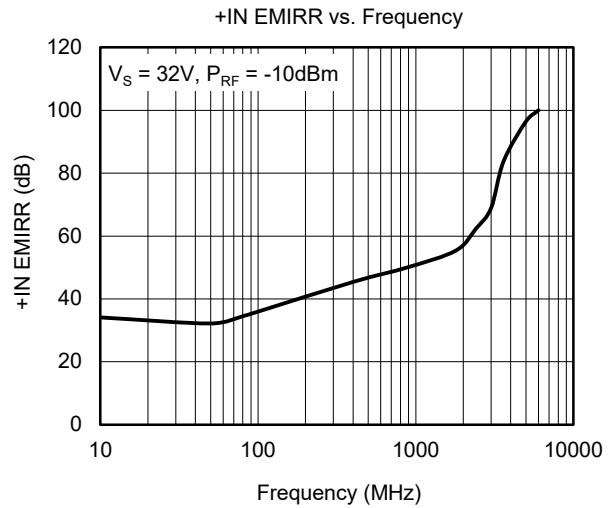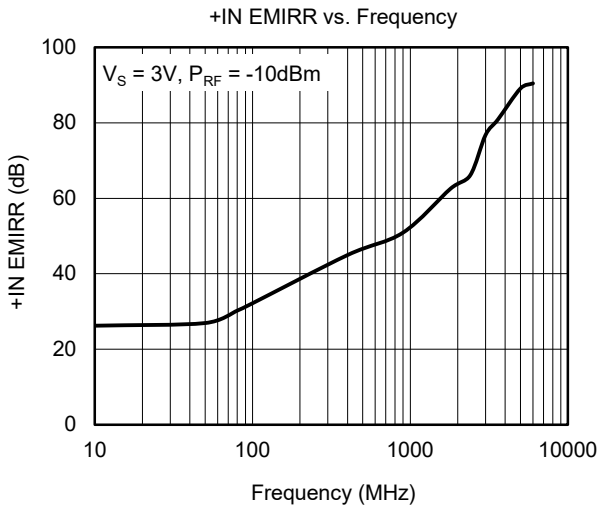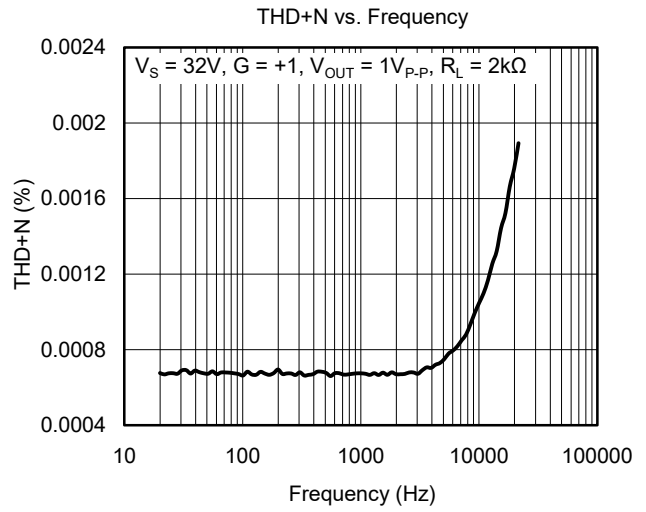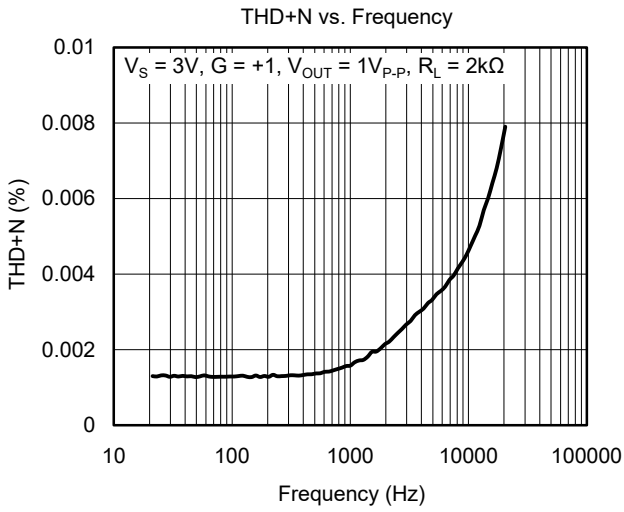

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

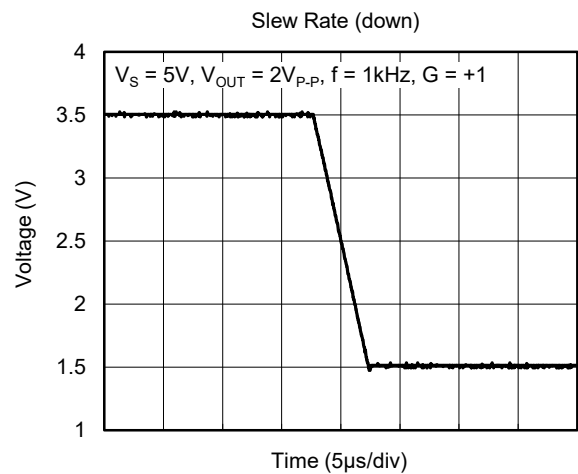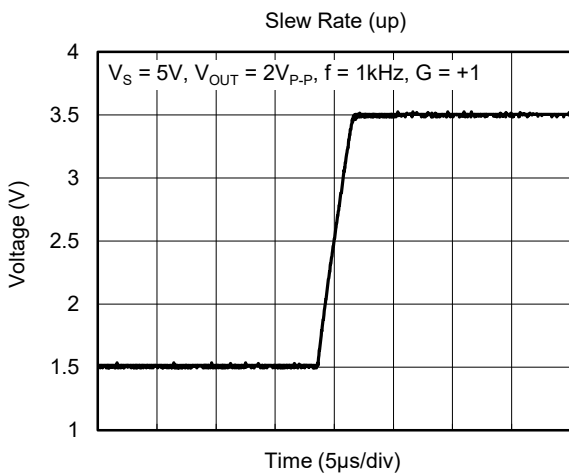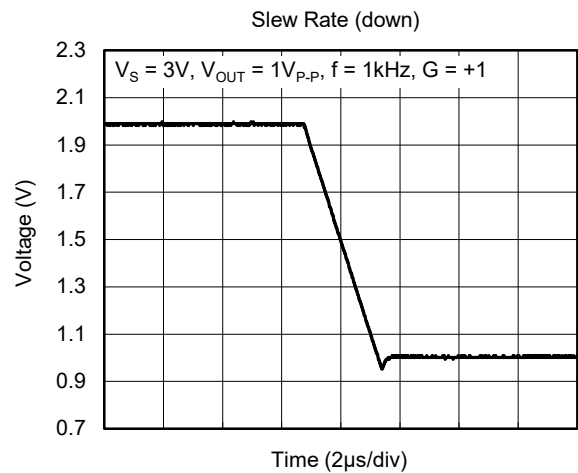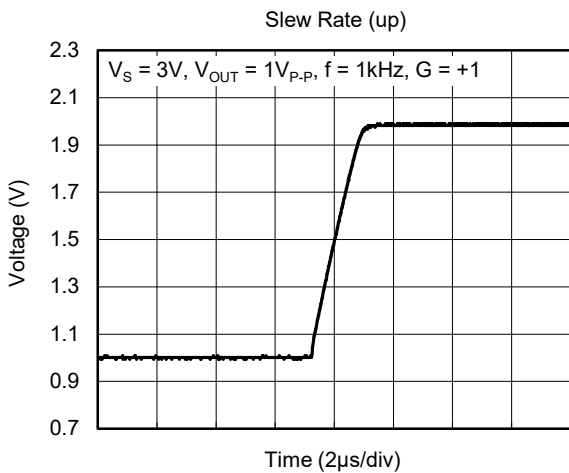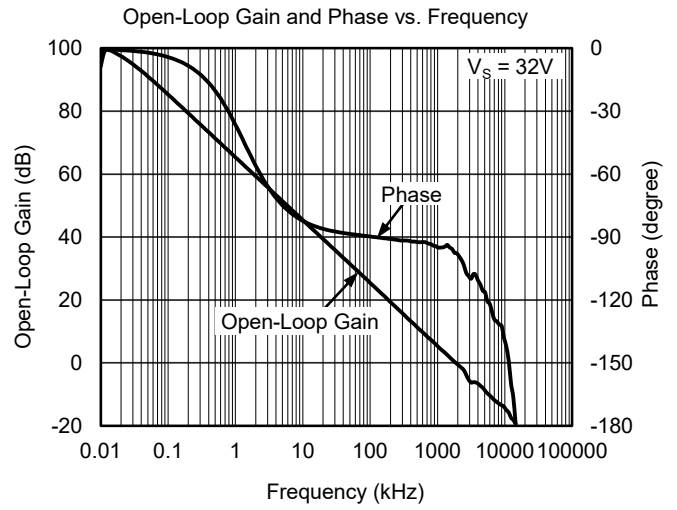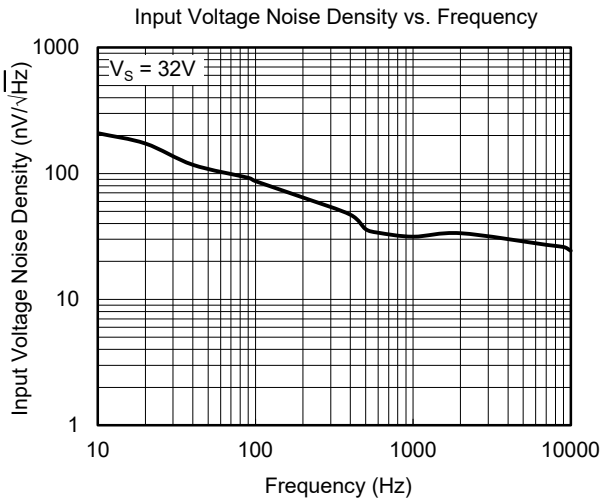









TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

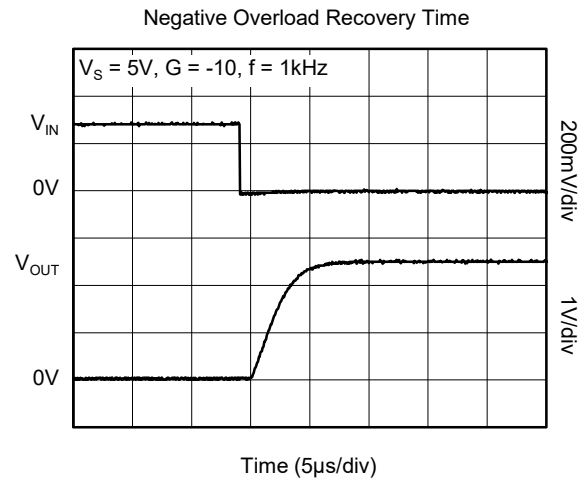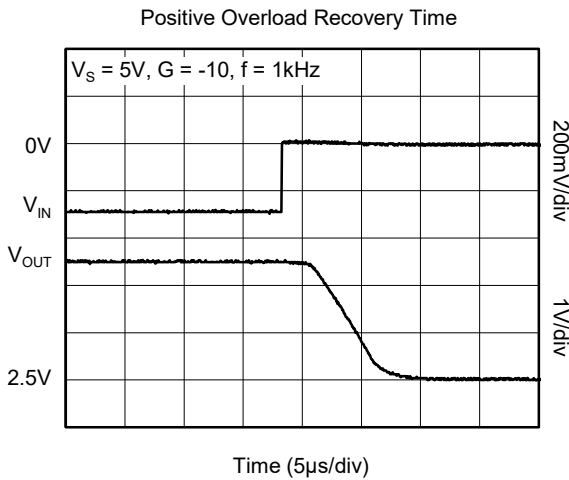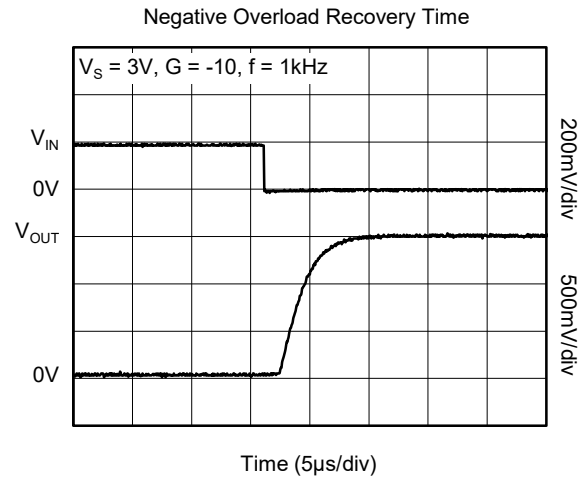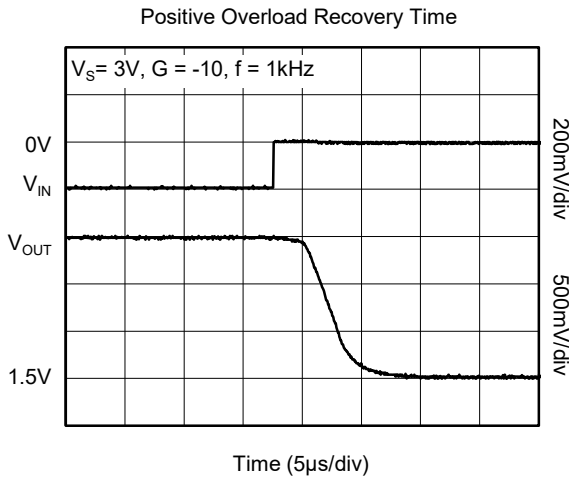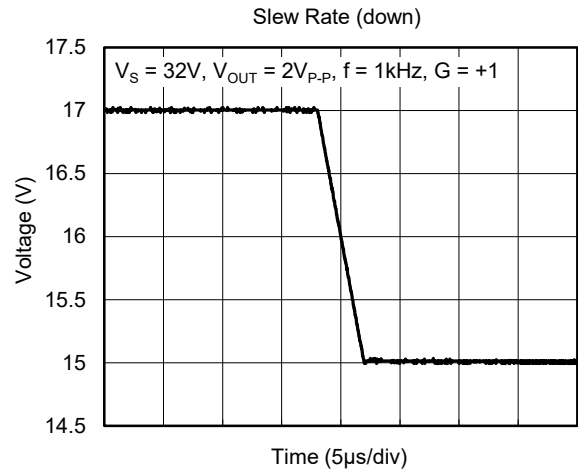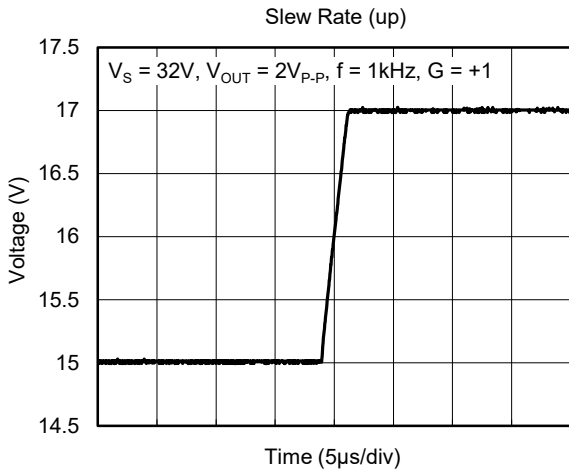

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

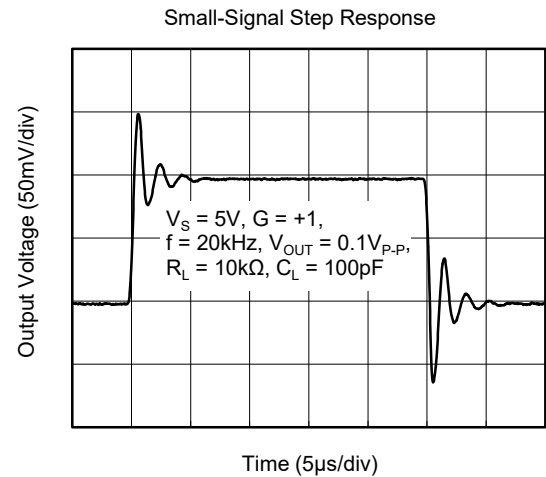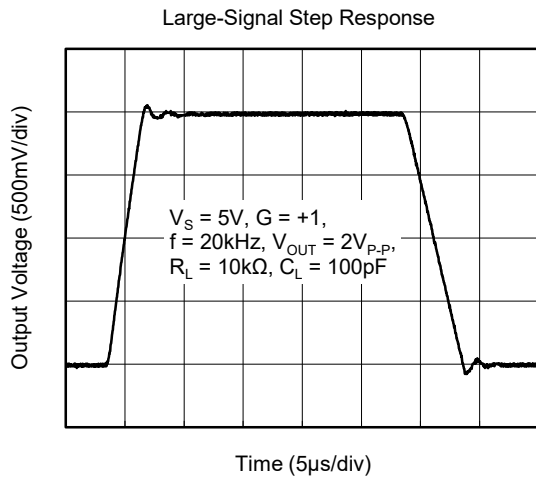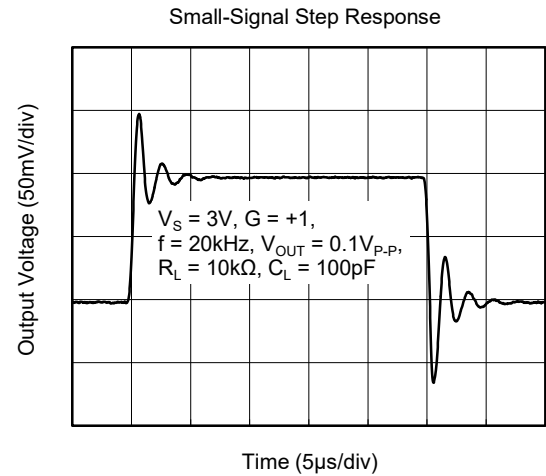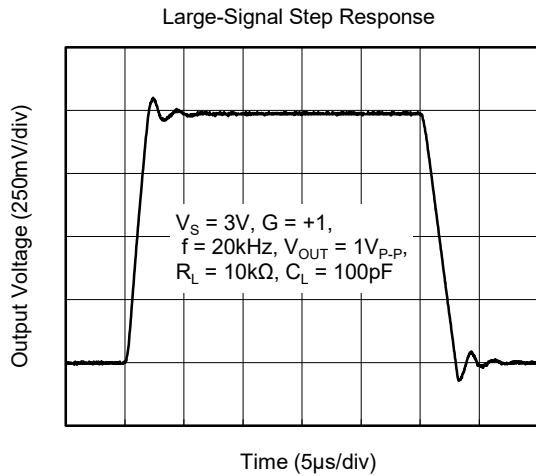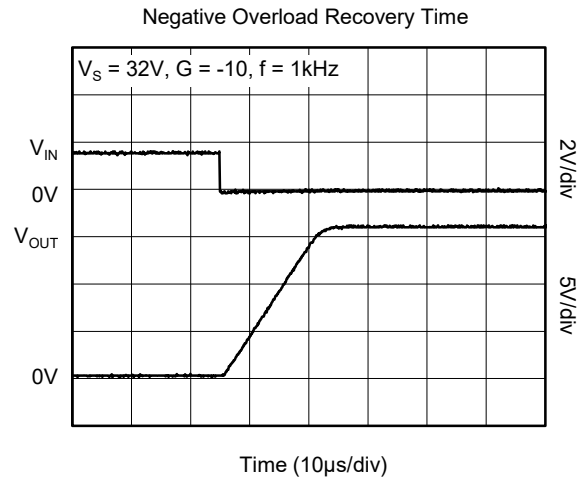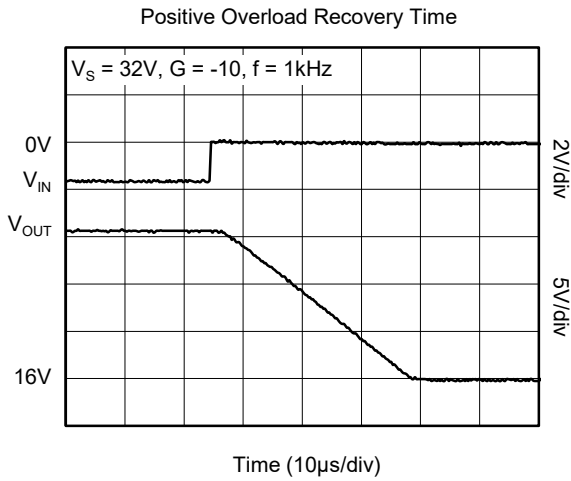

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

Large-Signal Step Response

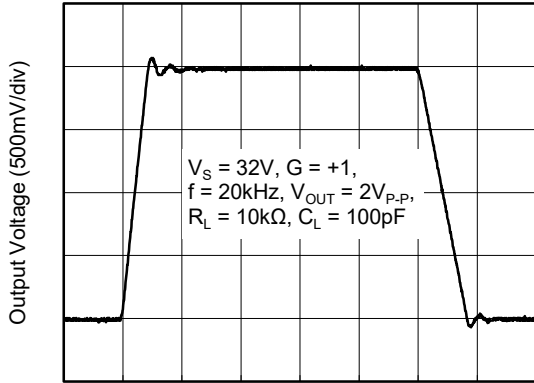


Time (5µs/div)

Small-Signal Step Response

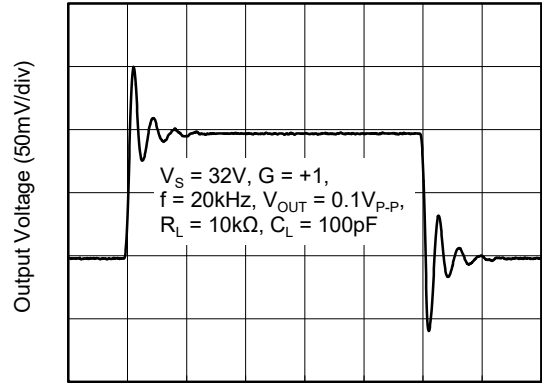


Time (5µs/div)

Turn-On Time

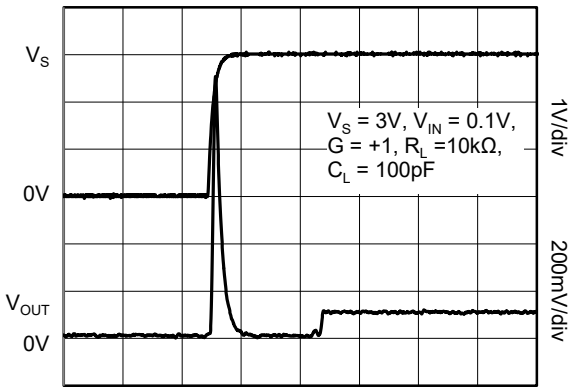


Time (20µs/div)

Turn-On Time

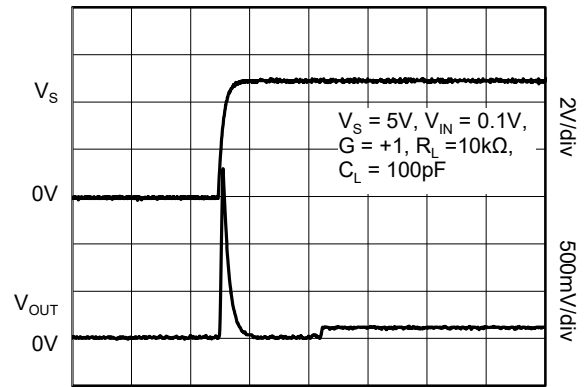


Time (20µs/div)

Turn-On Time

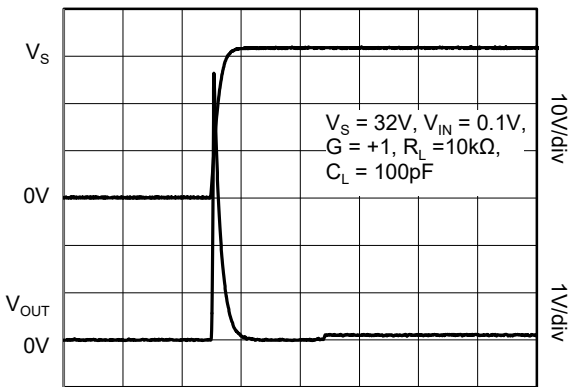

Time (20µs/div)







0.1Hz to 10Hz Input Voltage Noise

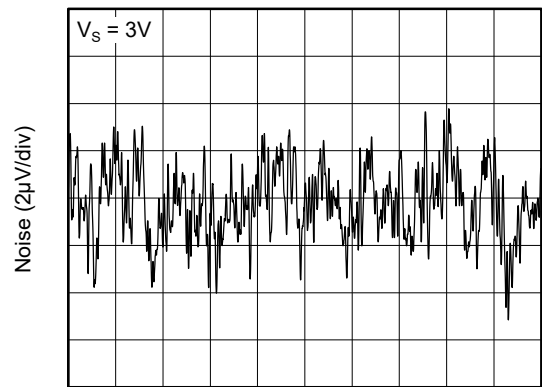

Time (2s/div)



TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

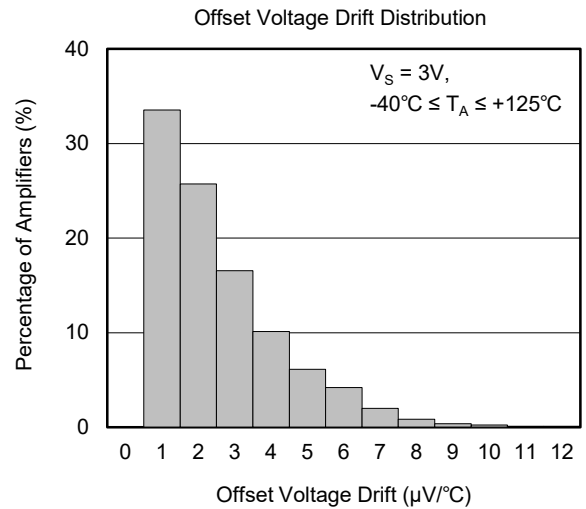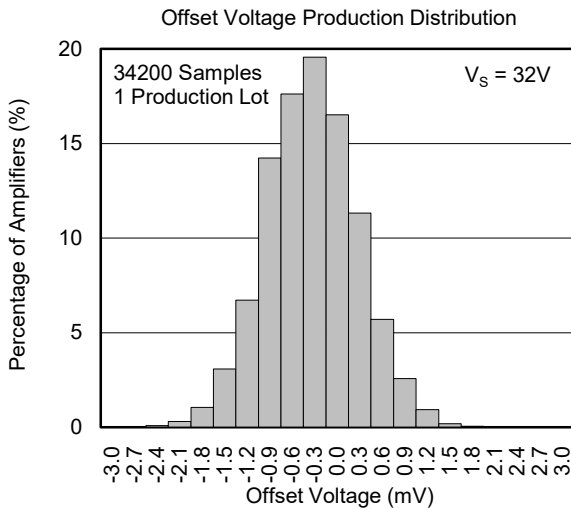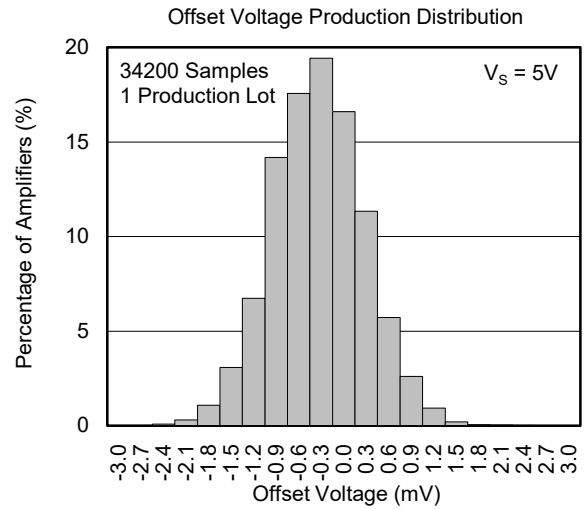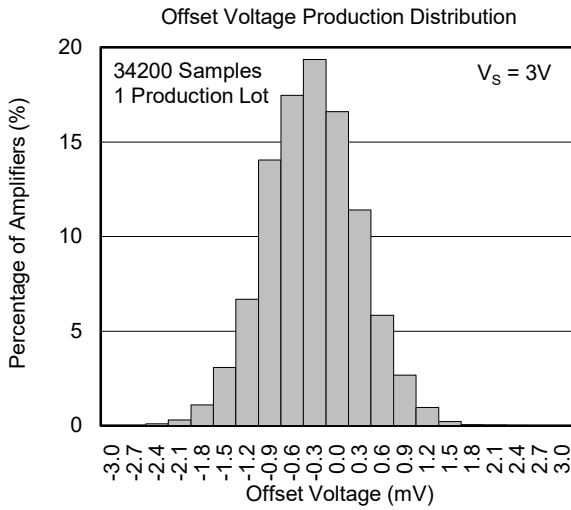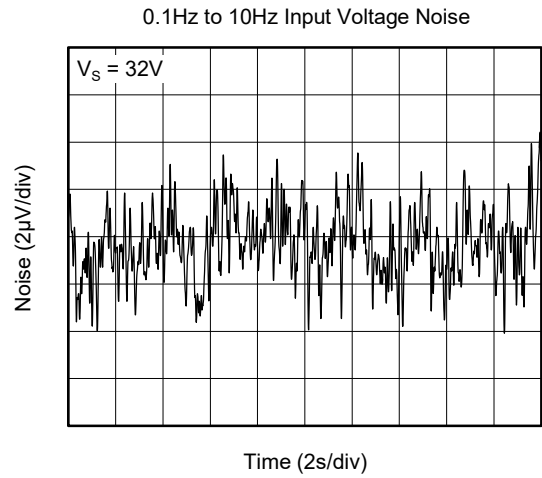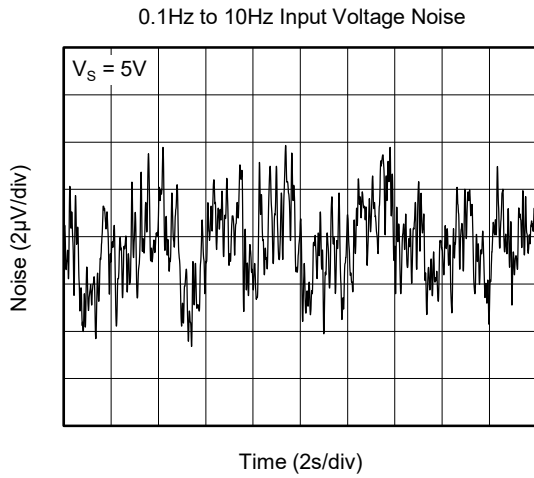

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

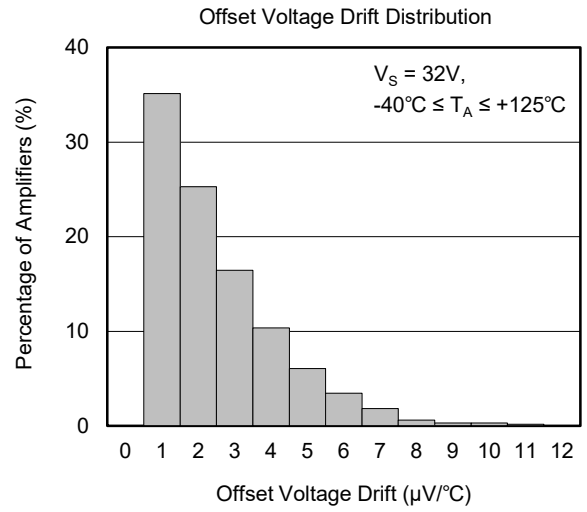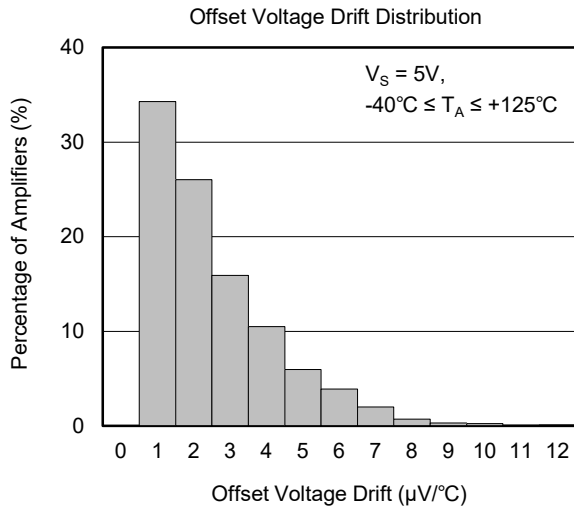

## LM321X

### DETAILED DESCRIPTION

The LM321X is an independent, high-gain frequency-compensated operational amplifier, which is designed to operate from a single supply over a wide range of voltages. Operation from dual supplies is also possible if the difference between the two supplies is 3V to 32V, and  $V_S$  is at least 1.5V more positive than the input common mode voltage.

Applications include transducer amplifiers, DC amplification blocks, and all the conventional operational amplifier circuits that now can be implemented more easily in single-supply-voltage systems. For example, the device can be operated directly from the standard 5V supply used in digital systems and can easily provide the required interface electronics without additional  $\pm 5V$  supplies.

#### Unity-Gain Bandwidth

The unity-gain bandwidth is the frequency up to which an amplifier with a unity gain may be operated without greatly distorting the signal. The device has a 1.1MHz unity-gain bandwidth.

### APPLICATION INFORMATION

The LM321X operational amplifier is useful in a wide range of signal conditioning applications. Inputs can be powered before  $V_S$  for flexibility in multiple supply circuits.

#### Typical Application

A typical application for an operational amplifier is an inverting amplifier. This amplifier takes a positive voltage on the input and makes it a negative voltage of the same magnitude. In the same manner, it also makes negative voltages positive.

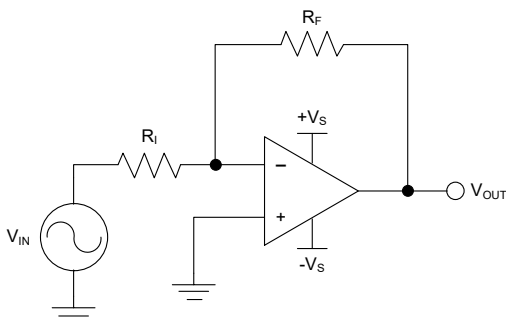


Figure 1. Application Schematic

#### Slew Rate

The slew rate is the rate at which an operational amplifier can change its output when there is a change on the input. The device has a 0.35V/ $\mu$ s slew rate.

#### Input Common Mode Voltage Range

The valid common mode voltage range is from device ground to  $(+V_S) - 1.5V$ . Inputs may exceed  $V_S$  up to the maximum  $V_S$  without device damage. At least one input must be in the valid input common mode voltage range for output to be correct phase. If both inputs exceed valid range then output phase is undefined. If either input is less than  $-0.3V$  then input current should be limited to 1mA and output phase is undefined.

#### Device Functional Modes

The device is powered on when the supply is connected. This device can be operated as a single-supply operational amplifier or a dual-supply amplifier depending on the application.

The supply voltage must be chosen such that it is larger than the input voltage range and output range. For instance, this application will scale a signal of  $\pm 0.5V$  to  $\pm 1.8V$ . Setting the supply at  $\pm 12V$  is sufficient to accommodate this application.

Determine the gain required by the inverting amplifier using Equation 1 and Equation 2.

$$A_v = \frac{V_{OUT}}{V_{IN}} \quad (1)$$

$$A_v = \frac{1.8}{-0.5} = -3.6 \quad (2)$$

Once the desired gain is determined, choose a value for  $R_I$  or  $R_F$ . Choosing a value in the k $\Omega$  range is desirable because the amplifier circuit will use currents in the mA range. This ensures the part will not draw too much current. This example will choose 10k $\Omega$  for  $R_I$  which means 36k $\Omega$  will be used for  $R_F$ . This is determined by Equation 3.

$$A_v = -\frac{R_F}{R_I} \quad (3)$$

**REVISION HISTORY**



NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>AUGUST 2021 – REV.A to REV.A.1</b>	<b>Page</b>
Updated Title in the header.....	All
Updated Features section.....	1
Updated Absolute Maximum Ratings section.....	2
Updated Recommended Operating Conditions section.....	2
Updated Electrical Characteristics section .....	3
Updated Typical Performance Characteristics section .....	4, 7



<b>Changes from Original (NOVEMBER 2019) to REV.A</b>	<b>Page</b>
Changed from product preview to production data.....	All

## PACKAGE OUTLINE DIMENSIONS

### SOT-23-5

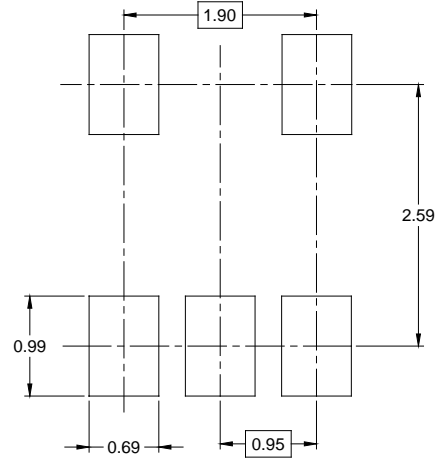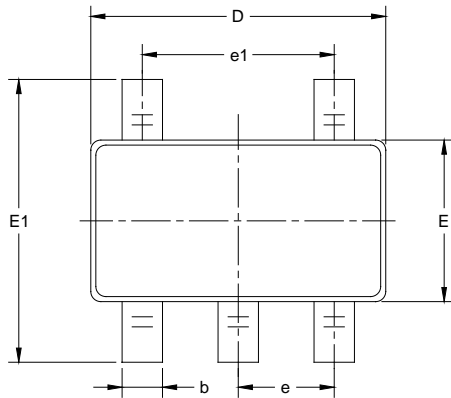

RECOMMENDED LAND PATTERN (Unit: mm)

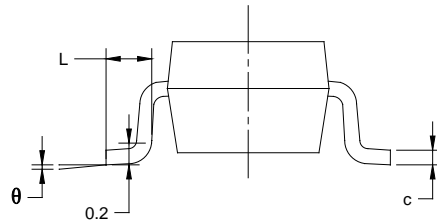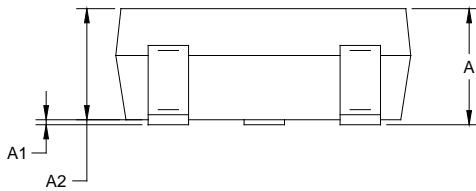

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.



# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS



### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002